

Mortice Mounted Specialised Function Locks

The **HS250** features an **automatic deadlocking function** with **automatic bolt throw**.

The **HS260** lock has **automatic deadlocking** as the HS250 but is provided with a **manual bolt throw operation**.

Features

- Available as a single, 2 or 3 point lock
- Automatic deadlocking function
- 25mm bolt engagement
 - HS250 - bolts automatically
 - HS260 - manual bolt operation
- Stainless steel forend and bolt guide plates
- Suitable for timber and steel doors

Options


- Bolt Position Monitoring
- Lock Position Monitoring
- Tall door kits available
- External key entry overrides automatic deadlocking
- Mechanical deadlock override via internal thumbturn with or without breakdome or internal key cylinder
- High security cylinder guard available

Standards

- Independently cycle tested to in excess of 1,000,000 cycles
- Fire tested to BS EN 1634-1



Dimensions

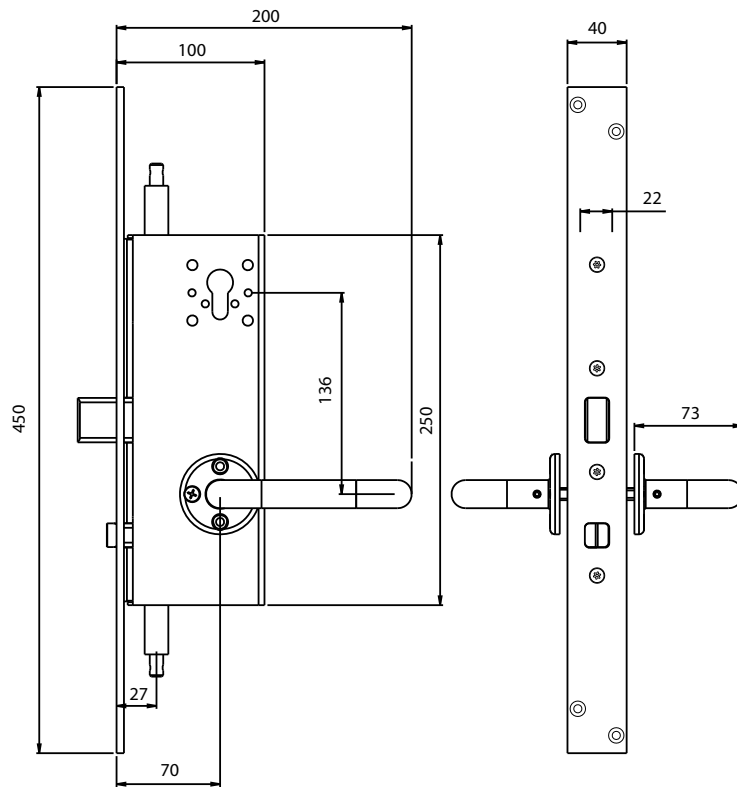

Note: Images show thumbturn options, with and without break dome.

Ordering Code Matrix and Technical Information


HS250 and HS260 Mortice Mount Locks

| | |
|---|------------------------------------|
| HS250 or HS260 | 2 - 6 - 5 - 101 - 1 - 0 - 0 |
| HS250 | 5 |
| HS260 | 6 |
| Handing & Locking Points (see chart opposite) | |
| Single Point | 1 |
| Single Point | 2 |
| Two Point | 3 |
| Two Point | 4 |
| Three Point | 5 |
| Three Point | 6 |
| Finish | |
| Brushed stainless steel | 1 |
| Configuration (cylinders not included) | |
| Internal lever operation only with thumbturn | 01 |
| Int. lever operation only with thumbturn & breakdome | 02 |
| As 01 but with external key facility & external handle | 03 |
| As 03 but with breakdome | 04 |
| As 03 but with cylinder guard | 05 |
| As 05 but with breakdome | 06 |
| As 01 but with internal key facility | 07 |
| As 07 but with external handle and key facility | 08 |
| As 08 but with cylinder guard | 09 |
| External operation only | 10 |
| As 10 but with cylinder guard | 11 |
| Door Thickness | |
| 48-56mm | 1 |
| 57-63mm | 2 |
| 64-73mm | 3 |
| 74-85mm | 4 |
| Europrofile Cylinder Make | |
| This information is to determine the cylinder guard type only. | |
| To order cylinder(s) see page 52 | |
| No cylinder required | 0 |
| Union | 1 |
| Assa Twin Combi | 2 |
| Abloy Protec | 3 |
| Yale | 4 |
| Kaba Expert | 5 |
| Kaba 20 | 6 |
| Other (please specify make and model) | 7 |
| Electric Monitoring | |
| None required | 0 |
| Bolt position | 1 |
| Lock position | 2 |
| Both positions | 3 |

Other Items:

- Europrofile Cylinders and Cylinder Guards - page 52
- Top Keeps, Centre Keeps and Floor Keeps - page 54
- Fixing Packs - page 53
- Tall Door Kits - page 53

Handing and Locking Chart

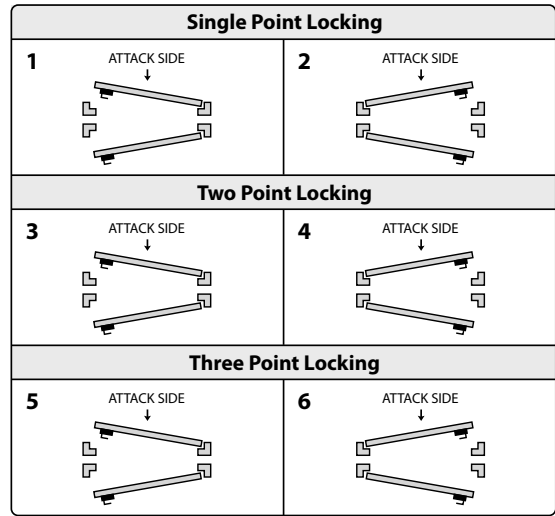

Configuration Chart: HS250 & HS260

Lever Handle

